



# SAFETY EYE WASHER

Defender/SE/SS-B100



021-32222322  
firedefenders@gmail.com



## TECHNICAL DATA

Safety Equipment's

### SPECIFICATION

- **Bowl** : Stainless Steel 304.
- **Inlet Valve** : Eye washer valve is making of 1/2" stainless steel 304 ball valve.
- **Outlet Drain** : water supply & drain outlet 1 1/4"
- **Water working pressure** : 0.2MPA-0. 4MPA
- **Flow control** : 76 Liters Per Minute
- **Original water** : clean water or leached water.
- **Activation** : Eye washer is activated by flag handle.
- **Type** : Wall mounted by 8mm rowel bolt
- **Brand** : Defender

Model # D/SE/SS-B100



## TECHNICAL DATA

Safety Equipment's

### SPECIFICATION

- **Bowl** : Stainless Steel 304.
- **Main Pipe** : Stainless Steel 304, (1.5mm thickness)
- **Inlet Valve** : Eye washer valve is making of 1/2" stainless steel 304 ball valve.
- **Outlet Drain** : water supply & drain outlet 1 1/4"
- **Water working pressure** : 0.2MPA-0. 4MPA
- **Flow control** : 76 Liters Per Minute
- **Original water** : clean water or leached water.
- **Activation** : Eye washer is activated by flag handle or foot treadle.
- **Floor Stand** : Fixed Floor stand by 8mm rowel bolt
- **Brand** : Defender

Model # D/SE-F/SS-E150/A



Model # D/SE/SS-E150/B



# SAFETY SHOWER

Defender/SE/SS-A100



021-32222322  
firedefenders@gmail.com



## TECHNICAL DATA

Safety Equipment's

### SPECIFICATION

- **Bowl** : Stainless Steel 304.
- **Main Pipe** : Stainless Steel 304, (1.5mm thickness)
- **Inlet Valve** : Eye washer valve is making of ½” stainless steel 304 ball valve.
- **Outlet Drain** : water supply & drain outlet 1 ¼”
- **Water working pressure** : 0.2MPA-0. 4MPA
- **Flow control** : 76 Liters Per Minute
- **Original water** : clean water or leached water.
- **Activation** : Shower is activated by pull rod.
- **Floor Stand** : Fixed Floor stand by 8mm rowel bolt
- **Brand** : Defender

Model # D/SE/SS-A100






## TECHNICAL DATA

Safety Equipment's

### SPECIFICATION

- **Head / Bowl :** Stainless Steel 304.
- **Main Pipe :** Stainless Steel 304 Sch-10 (2.5mm thickness)
- **Inlet Valve :** Shower valve is making of 1 ¼" Stainless Steel 304 ball valve and Eye washer valve is making of ½" stainless steel 304 ball valve.
- **Outlet Drain :** water supply & drain outlet 1 ¼"
- **Water working pressure :** 0.2MPA-0. 4MPA
- **Flow control :** 76 Liters Per Minute
- **Original water :** clean water or leached water.
- **Activation :** Shower is activated by pull rod. Eye washer is activated by flag handle or foot treadle.
- **Floor Stand :** Fixed Floor stand by 8mm rowel bolt
- Available Colors : Natural, Orange, Green
- **Brand :** Defender

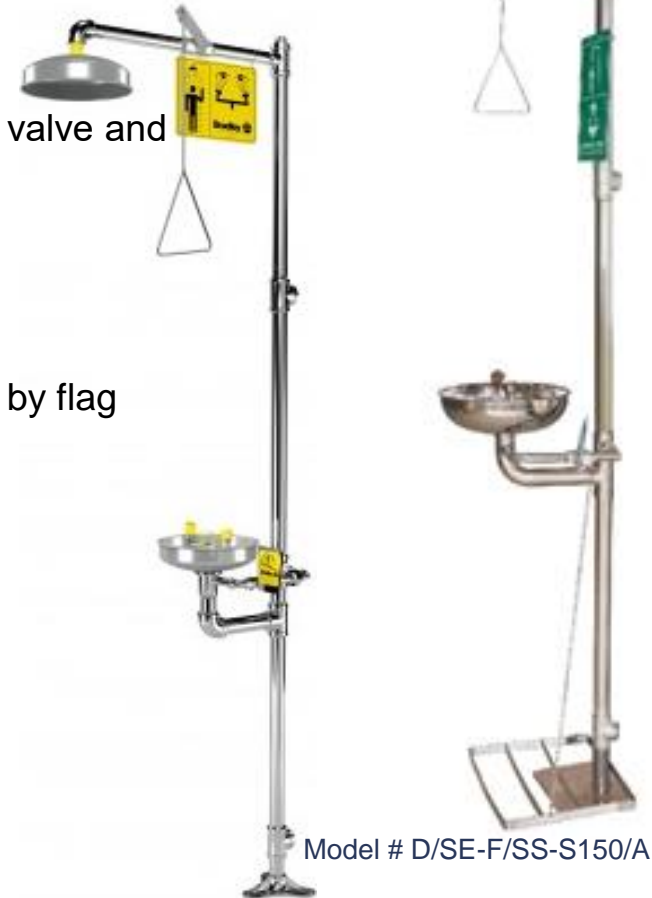

Model # D/SE-F/SS-S150/A

Model # D/SE/SS-S150/B